Subject: Geometry Problems Posted by Stefan Pflueger on Tue, 19 Apr 2016 12:47:11 GMT

View Forum Message <> Reply to Message

Hello everybody,

I wanted to inform you about a problem we have been dealing with the last week concerning our lumi detector geometry. Since this can also affect many other detector subsystems I wanted to share this with you. After an update of the fairroot (FairRoot-v-15.03) and external packages (mar15), we discovered that our 2 dimensional angular acceptance all of a sudden showed almond like shaped inefficiencies on the edges of our modules.

We analyzed the situation and came to the conclusion that this effect arises from the geometry not being constructed or simulated as we wanted.

We have 10 modules aligned around the beampipe in circle. Each module consists of a diamond support and cooling structure having glued on 5 MuPix sensors on its front and 5 more on this back face. The problem was that the diamond structure was constructed from a circle (or complete tube segment) and then being cut to the appropriate dimensions via a CompositeShape.

```
876
877
        // the cvd disc shape
878
        TGeoTube* shape cvd disc = new TGeoTube("shape cvd disc", 0.,
879
                  cvd disc rad, cvd disc thick half);
880
        // The inner beam pipe defines the inner acceptance region for the cvd cut out
        TGeoTube* shape_cvd_cutout_inner = new TGeoTube("shape_cvd_cutout_inner",
881
882
                  0., inner_rad, 1.);
883
        // finally cvd discs will be cut at the left and right down to 36 degree in phi
884
        // for that we subtract tube segments
        TGeoTubeSeq* shape cvd disc cut side = new TGeoTubeSeq(
885
886
                  "shape cvd disc cut side", 0., outer rad, 1.,
887
                  +delta phi / 2. / pi * 180.,
                  -delta_phi / 2. / pi * 180.);
888
        // before: cvd disc was moved to the displaced position around the z axis
889
        // now: segments for the cut are moved off centered and cvd disc remains in the
890
center
891
        TGeoRotation* cvd_rotation = new TGeoRotation("cvd_rotation", 0, 0, 0);
892
        TGeoTranslation* cvd translation = new TGeoTranslation("cvd translation",
893
                  -cvd disc dist, 0, 0):
894
        TGeoCombiTrans* cvd combtrans = new TGeoCombiTrans(*cvd translation,
895
                  *cvd rotation);
896
        cvd combtrans->SetName("cvd combtrans");
        cvd combtrans->RegisterYourself();
897
        TGeoCompositeShape
898
899
        *shape cvd support =
                 new TGeoCompositeShape(
900
901
                           "shape_cvd_support",
902
"(shape_cvd_disc-shape_cvd_cutout_inner:cvd_combtrans-shape_cvd_disc_cut_side:cvd_co
mbtrans)");
903
```

```
904 TGeoVolume* Imd_vol_cvd_disc = new TGeoVolume("Imd_vol_cvd_disc", 
905 shape_cvd_support, fgGeoMan->GetMedium("HYPdiamond"));
906 Imd vol cvd disc->SetLineColor(9);
```

The problem was that when we visually checked the geometry, everything seemed just fine. However in the simulation, the diamond was not cut off but the full circular shaped remained! Hence we observed a twice as high material budget on the edges of our modules that created this inefficiency in the acceptance.


The red circle drawn into this picture would show where the diamond wafer would be sitting and its shows that it perfectly aligns with this almond like shape in the acceptance. So simply changing this diamond shape to a tube segment with the correct phi and radii from the beginning on, prevented this overlap from appearing and the acceptance looked fine again.

```
// the cvd disc shape
886
         double gap between disc and support structure(0.025); // 250 mu gap
887
         TGeoTubeSeg* shape_cvd_disc = new TGeoTubeSeg("shape_cvd_disc", inner_rad,
                  Imd_cool_sup_inner_rad - gap_between_disc_and_support_structure,
888
                  cvd disc thick half, -delta phi / 2. / pi * 180.,
889
890
                  +delta phi / 2. / pi * 180.);
891
892
         TGeoRotation* cvd rotation = new TGeoRotation("cvd rotation", 0, 0, 0):
893
         TGeoTranslation* cvd_translation = new TGeoTranslation("cvd_translation",
894
                  -cvd disc dist, 0, 0);
895
         TGeoCombiTrans* cvd_combtrans = new TGeoCombiTrans(*cvd_translation,
                  *cvd_rotation):
896
         cvd_combtrans->SetName("cvd_combtrans");
897
         cvd combtrans->RegisterYourself();
898
899
900
         //this next line is pretty stupid but it made the work for the better geometry minimal
         //otherwise I would have to do some deeper digging and reworking...
901
902
         TGeoCompositeShape *shape cvd support = new TGeoCompositeShape(
903
                  "shape_cvd_support",
904
                  "(shape_cvd_disc:cvd_combtrans+shape_cvd_disc:cvd_combtrans)");
905
906
         TGeoVolume* Imd vol cvd disc = new TGeoVolume("Imd vol cvd disc".
907
                  shape_cvd_support, fgGeoMan->GetMedium("HYPdiamond"));
908
         Imd_vol_cvd_disc->SetLineColor(9);
```


Either we are not using the composite shapes correctly in our code or ROOT seems to have a bug there.... Did anyone ever experience similar problems. I guess we were also lucky seeing this after all, as the material budget has to be just enough to actually slow down the particles enough so they are not seen in the last layers of the tracking detector anymore.

Best regards,


File Attachments
1) acc2d.png, downloaded 1294 times

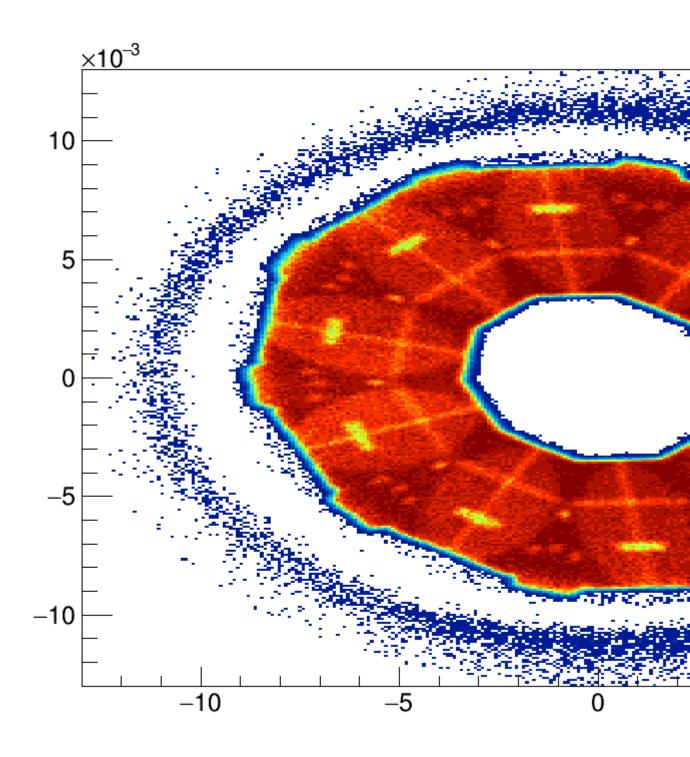

2) circle.png, downloaded 1218 times

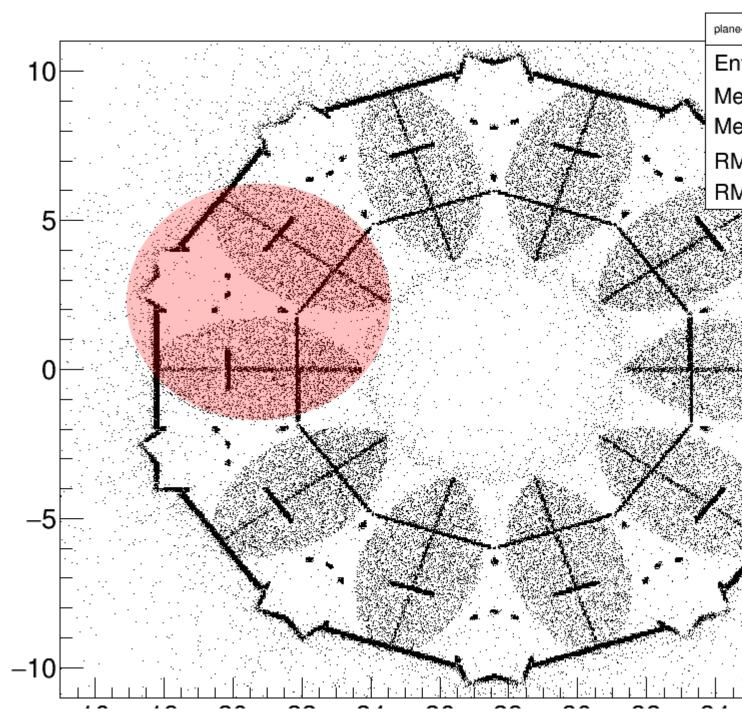

3) sensor-overlap-new.png, downloaded 1237 times

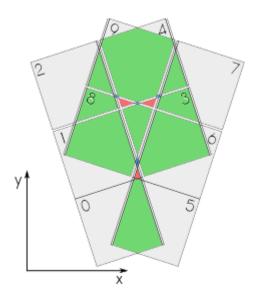

4) acc2d.png, downloaded 1173 times

Page 5 of 6 ---- Generated from

GSI Forum

