
Subject: eta_c generation with EvtGen

Posted by [Dima Melnychuk](#) on Thu, 01 Dec 2011 11:44:57 GMT

[View Forum Message](#) <> [Reply to Message](#)

Dear all,

I found one conceptual problem with eta_c event generation which was due to my misunderstanding of EvtGen event generator.

Namely in eta_c produced in p+pbar in formation experiment scan will be performed at several energies around resonance and what it does make sense to study for tracking TDR is one momentum point corresponding to resonance maximum. And here a shape of eta_c resonance should not be considered at all. At least it is my understanding and in this way the studies were done for example for physics book.

But producing eta_c with

```
PndEvtGenDirect *EvtGen = new PndEvtGenDirect("etac","EtaCInclusive_2phi.dec");
```

eta_c was taken on different positions of resonance.

Here PndEvtGenDirect behave a little bit strange, namely for one run or one seed of random number generator it takes one fixed mass. And when I generated 1000 eta_c locally with one seed I had as a result for efficiency which was different from efficiency obtained on grid, and as Stefano observed last time eta_c width for 1000 events was 2 times smaller than on grid because it was for one fixed point, whereas on the grid it was averaged over resonance shape.

So I updated run_sim_stt_evt.C for

```
PndEvtGenDirect *EvtGen = new
```

```
PndEvtGenDirect("pbarpSystem","EtaCInclusive_2phi.dec",3.6772);
```

and in decay file EtaCInclusive_2phi.dec

I replaced etac for pbarpSystem

So at least it's my understanding how it should be done.

So event generation how it was done y now was not incorrect but it was not I supposed its was.

Particularly applying 4C-fit makes sense for fixed pbar momentum for each point of resonance scan.

So, any opinion?

And if there are no objections I would like to ask Stefano to generate once again data on grid. It will require update of run_sim_stt_evt.C and EtaCInclusive_2phi.dec and in principle do not require update of pandaroot on grid (but will require modification of script for data production).

Situation is the same for psi(3770) but this problem is NOT related to multipion channel.

Best regards,

Dima

Subject: Re: eta_c generation with EvtGen
Posted by [Stefano Spataro](#) on Thu, 01 Dec 2011 14:48:22 GMT
[View Forum Message](#) <> [Reply to Message](#)

Hi,
I just sent eta_c runs 926fix and 926cufix with pbarpSystem as initial state.
Before sending also the psi jobs I would like to check results with the new "fix" code for eta_c,
and also the results for the "normal" psi.

Today the grid should be a bit faster than yesterday, we have back KVI fully operational and
also Vienna.

Subject: Re: eta_c generation with EvtGen
Posted by [Dima Melnychuk](#) on Fri, 02 Dec 2011 13:35:43 GMT
[View Forum Message](#) <> [Reply to Message](#)

Hi,
I have rerun eta_c reconstruction for runs 926fix and 926cufix and results are the following.

Run 926fix, efficiency 27.3% (vs 25.8% for run 926 where eta_c width was considered)
 $\sigma(\eta_c) = 18.4$ MeV (vs 31.6 MeV for run 926) and $\sigma(\phi) = 3.87$ MeV (without
changes).


Run 926cufix with cleanup on, efficiency 19.1%, $\sigma(\eta_c) = 17.5$ MeV, $\sigma(\phi) = 3.85$
MeV.

So I suppose this run can be used for mixing with background.


Dima

File Attachments

1) [m_run926fix.png](#), downloaded 928 times

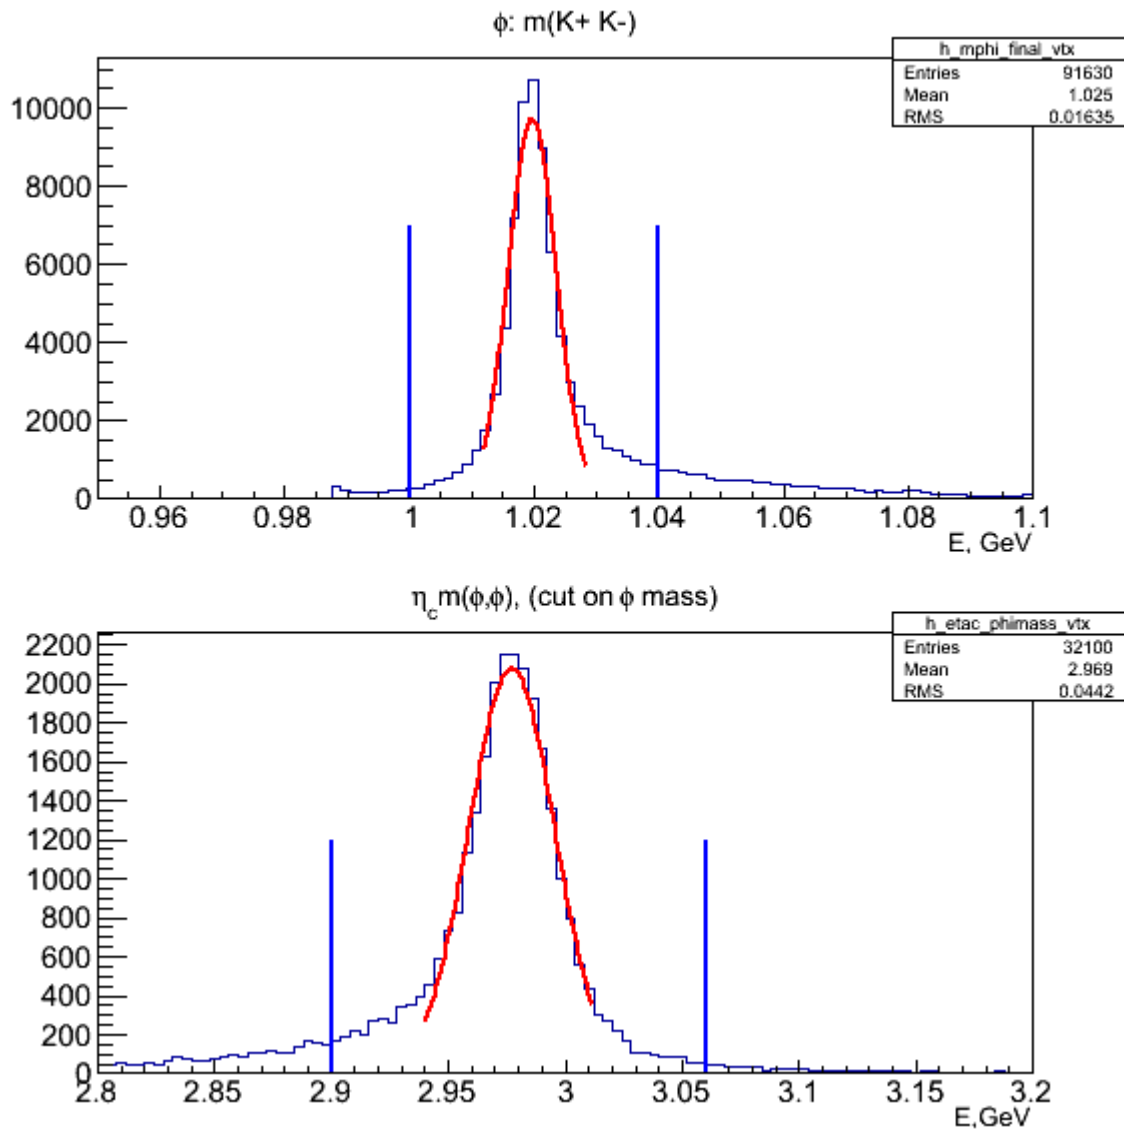

2) [m_run926cufix.png](#), downloaded 1019 times

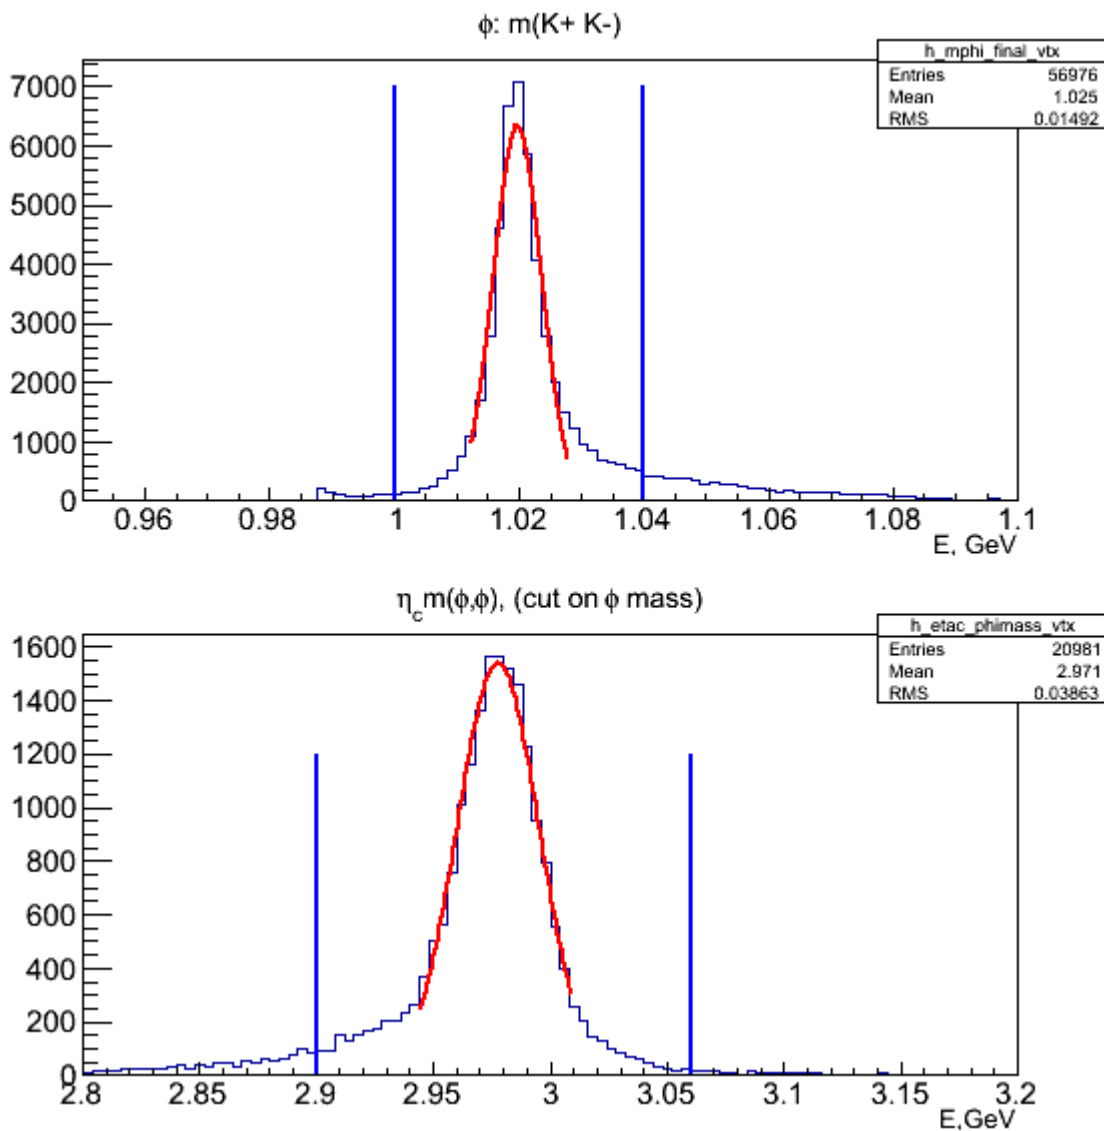

Subject: Re: eta_c generation with EvtGen

Posted by [Stefano Spataro](#) on Fri, 02 Dec 2011 19:52:55 GMT

[View Forum Message](#) <> [Reply to Message](#)

Hi,

I have tried to apply the same change for the psi channel, with the following dec:

```
spataro@briareos:~/trunk/pandaroot/macro/run/tdrct/psi3770$ cat psi3770_fix.dec
noPhotos
```

```
#
```

```
Decay pbarpSystem
```

```
1.0 D+ D- VSS;
```

```
Enddecay
```

```
#
```

```
Decay D-
```

```
1.0 K+ pi- pi- PHSP;
```

```
Enddecay
```

```
#
```

```
Decay D+
1.0   K- pi+ pi+          PHSP;
Enddecay
#
End
```

The problem is that in this case pbarpSystem is not a vector, then I have the following error:

```
EvtGen:In readDecayFile, reading:psi3770_fix.dec
EvtGen:As requested, PHOTOS will be turned off.
EvtGen:VSS did not get the correct parent spin
pbarpSystem -> D+ D- (VSS):
EvtGen:Will terminate execution!
```

I am not sure on what this VSS model is doing, now the question if it we should put phase space as model, or set the initial spin of pbarpSystem to 1 in the evt.pdl... but there is no reason that a pbar p collision would have only a spin 1!
I could put phase space, but before starting I would like to know what we should use exactly...

Ok, I will run with Phase Space to save some time, waiting for some comment on this side.

Subject: Re: eta_c generation with EvtGen
Posted by [Dima Melnychuk](#) on Sat, 03 Dec 2011 22:35:52 GMT
[View Forum Message](#) <> [Reply to Message](#)

Hi Stefano,

Actually I think that preferable solution here is to put spin of pbarpSystem to 1.

In general in proton-antiproton annihilation limiting to S and P waves 6 states with different quantum numbers are possible. Particularly $\Psi(3770)$ as $J^{PC}=1^{--}$ state correspond to 3S_1 of p-pbar system.

And in principle if we know that $\Psi(3770)$ is produced means that annihilation took place with these quantum numbers.

So spin of pbarpSystem should be adjusted to the spin of particle we want to produce. Of course it's a little bit inconvenient to edit evt.pdl every time for this purpose but I do not know another solution at the moment.

Dima

Subject: Re: eta_c generation with EvtGen
Posted by [Stefano Spataro](#) on Sun, 04 Dec 2011 00:24:16 GMT
[View Forum Message](#) <> [Reply to Message](#)

Ok,
I sent psi jobs with VSS and a modified evt.pdl (pbarpSystem spin 1).

Subject: Re: eta_c generation with EvtGen
Posted by [Stefano Spataro](#) on Tue, 06 Dec 2011 22:24:38 GMT
[View Forum Message](#) <> [Reply to Message](#)

I have just sent the mixed events for the four channels.

I have seen many warnings coming from MCTrackAssociator, saying that many tracks have `refIndex<0`. Let's see what comes out, I am not sure if there are still some bugs in the processing or if it is normal considering that we have also background tracks.
