
Subject: [SOLVED] PScatterCrossSection with pi0 decay
Posted by [Michael Kunkel](#) on Sun, 19 May 2013 14:22:24 GMT
[View Forum Message](#) <> [Reply to Message](#)

Greetings,

PLEASE DISREGARD THIS AND CONTINUE TO SECOND POST. Thanks.

Original message:

I had noticed that the PScatterCrossSection method described by this first example fails to create a distribution if eta is replaced with pi0.

Can this be examined please?

Thanks

Michael

Subject: Re: PScatterCrossSection with pi0 decay
Posted by [Michael Kunkel](#) on Tue, 21 May 2013 21:54:53 GMT
[View Forum Message](#) <> [Reply to Message](#)

Here is a more in-depth explanation.

I have a script, pi0_XSection.C, in which I ask PLUTO to sample the inputted histograms. For the sample provided, I ask only one c.m. energy and one histogram. I get a flat distribution in Cos(theta) instead of the inputted histogram. See figure 1.

Then I change that macro for the case when I have known this procedure to work, eta (macro pi0_maskEta_XSection.C), and I run it. I get a topology similar to the inputted histogram. See figure 2.


Thanks

Michael

File Attachments


- 1) [PI0_Hists.root](#), downloaded 378 times
- 2) [pi0_XSection.C](#), downloaded 377 times
- 3) [pi0_maskEta_XSection.C](#), downloaded 402 times
- 4) [XSECTIO_GEN_PLOTSPLUTO_PI0_generated_cos_theta.png](#),
downloaded 842 times

PLUTO generated c.m. Cosθ pi0

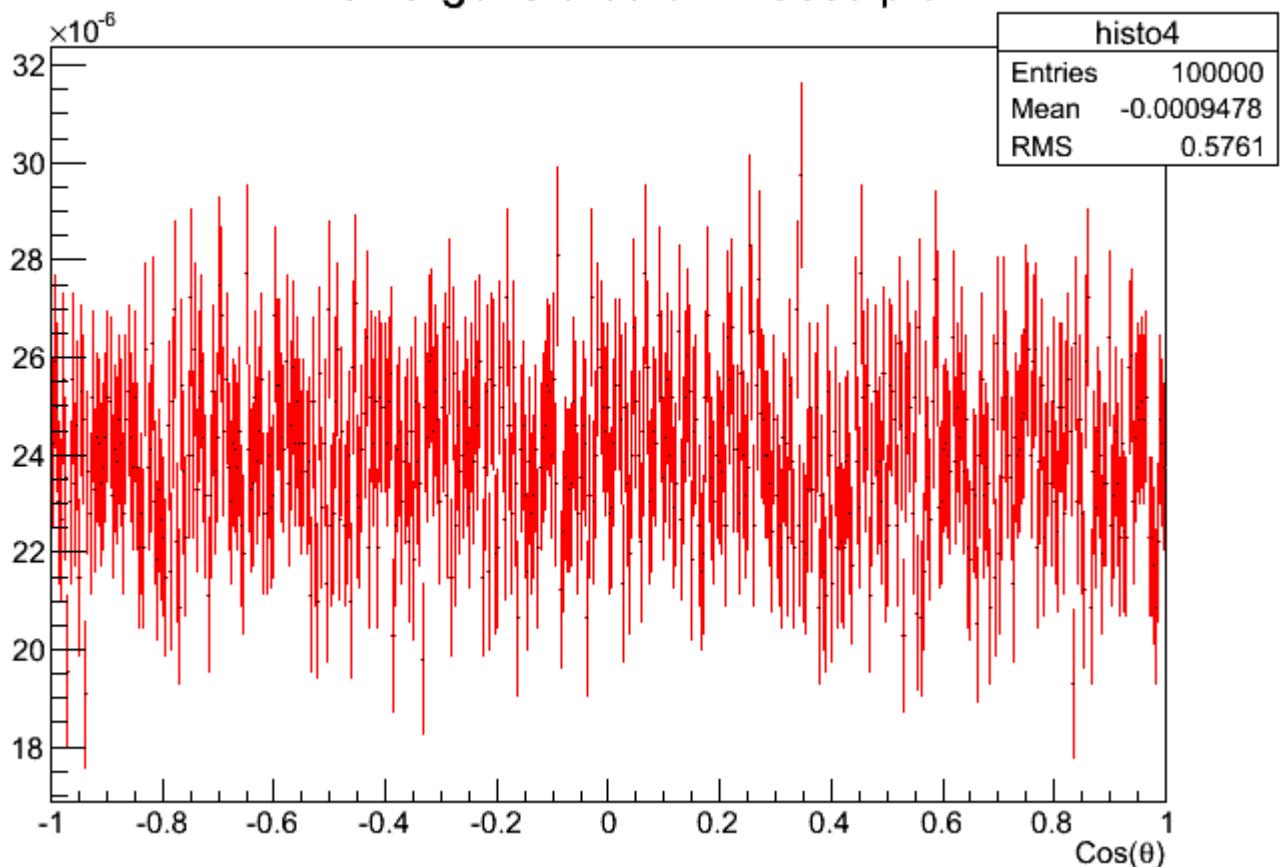

5) XSECTIO_GEN_PLOTSPLUTO_ETA_generated_cos_theta.png ,
downloaded 773 times

PLUTO generated c.m. Cosθ eta

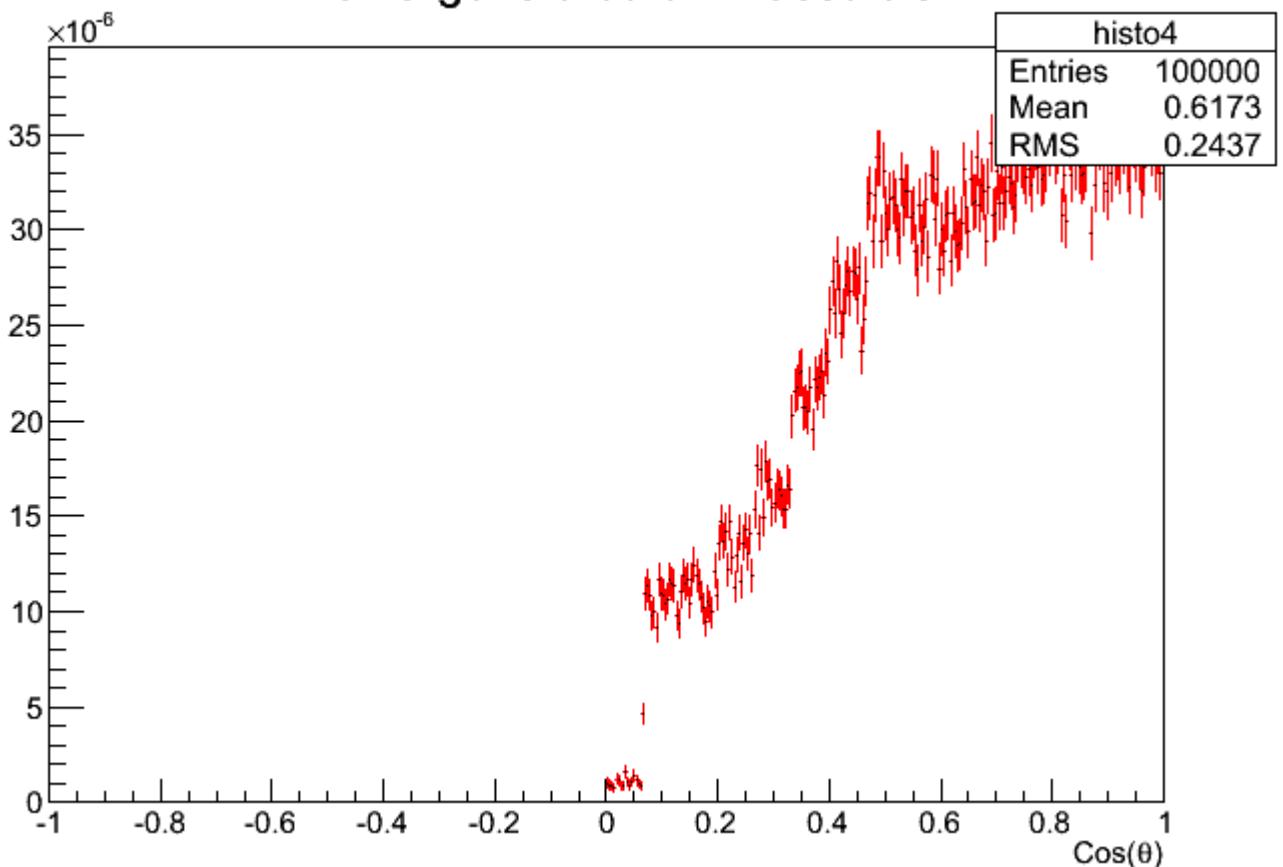

Subject: Re: PScatterCrossSection with pi0 decay
Posted by [Ingo Froehlich](#) on Wed, 22 May 2013 06:57:54 GMT
[View Forum Message](#) <> [Reply to Message](#)

Remember the template:

```
PScatterCrossSection *model = new PScatterCrossSection("mymodel","My cross section");
model->Add("g,grandparent,beam");
model->Add("p,grandparent,target");
model->Add("q,parent");
model->Add("p,daughter");
model->Add("eta,daughter,primary");
```

must match to the reaction:

```
PReaction my_reaction("_P1 = 2.2","g","p","p pi0 [dilepton [e+ e-]
g]","pi0_dalitz_QEDFF",1,0,0,0);
```

one can see this very nicely when using Print(), the model "mymodel" must appear.

Subject: Re: PScatterCrossSection with pi0 decay

Posted by Michael Kunkel on Wed, 22 May 2013 11:28:38 GMT

[View Forum Message](#) <> [Reply to Message](#)

Sorry and thanks.
