

---

Subject: Chi2 of kinematic and vertex fitters

Posted by [Stefano Spataro](#) on Thu, 28 Nov 2013 16:07:39 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Dear analysis experts,

I run the standard macro/run/ana\_complete.C macro and checked the chi2 distributions of the three fitters implemented there, vertex mass and 4C.


Here the plots:

You can see that the vertex fitters shows still negative values of chi2. I supposed this was fixed. Did I forget something, or maybe there is still something to debug?

---

### File Attachments

1) [chi2.gif](#), downloaded 893 times

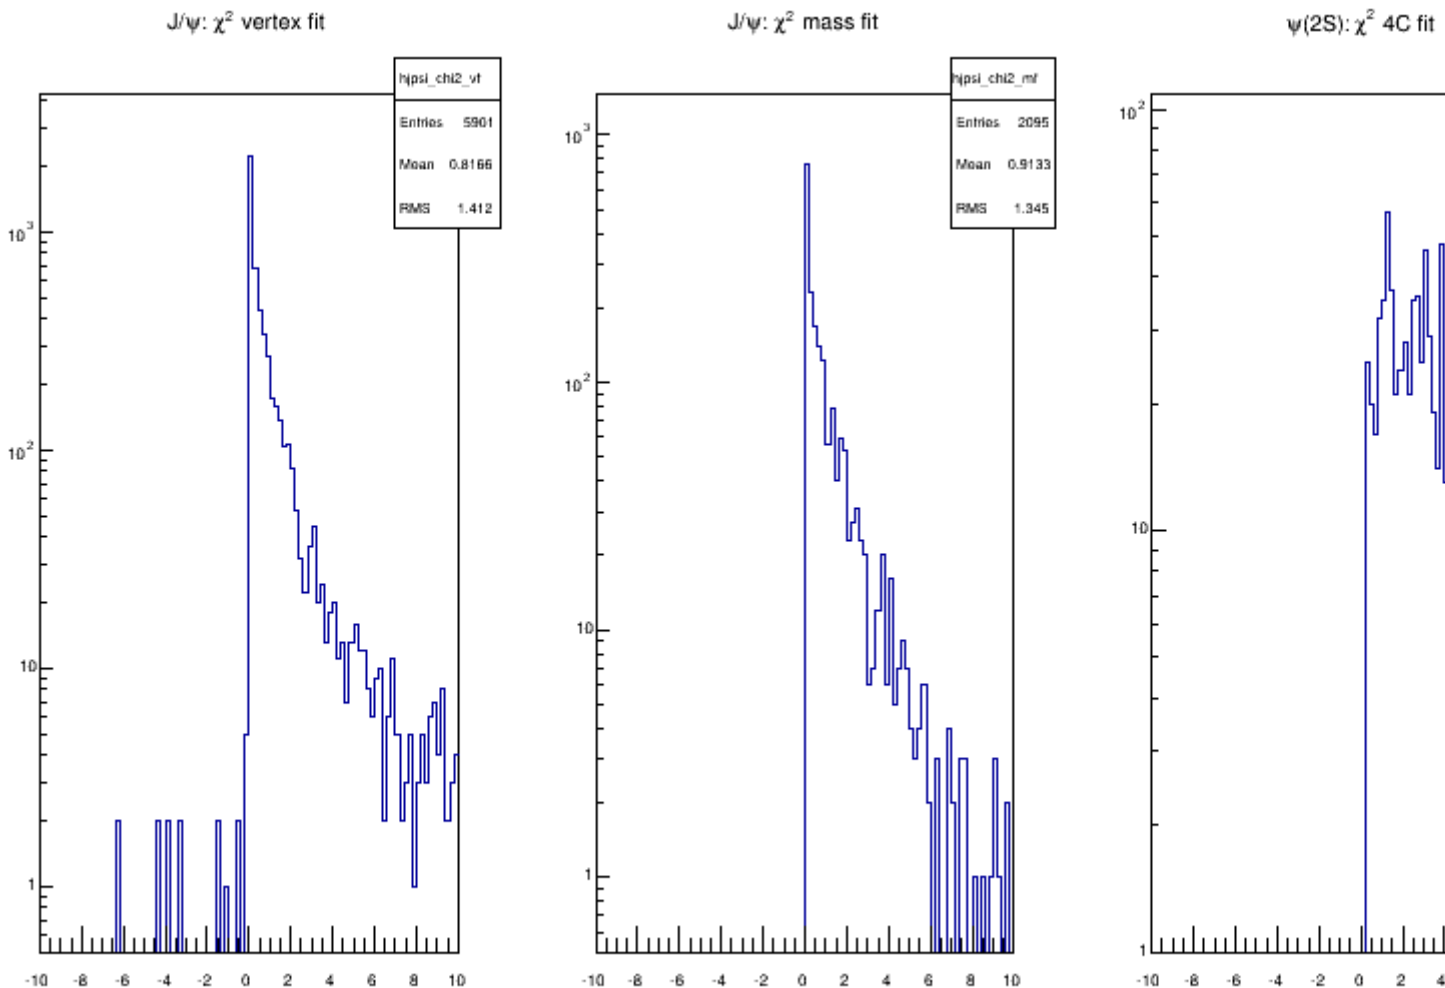

---

Subject: Re: Chi2 of kinematic and vertex fitters

Posted by [Elisabetta Prencipe \(2\)](#) on Tue, 03 Dec 2013 10:49:48 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Hi Stefano,

I am running my test jobs in the pandaroot rev. 22626, and I found again negative chi2 of the vertex fit (only; the mass fit constraint does not give negative chi2 in my case). The difference with the previous revision (rev 21003) is that now I get improvements: only decays where photons got involved give me few entries with negative chi2. In the previous revision (21003), I had many of them. Also, the efficiency is definitively improved in the new revision (22626): in the decay  $p \bar{p} \rightarrow D_s D_s^*(2536)^+$ ,  $D_s^*(2536)^+ \rightarrow D^* \pi^+$ , I have got:

rev 21003: 21% efficiency

rev 22626: 30% efficiency

cheers, Elisabetta

---

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Ralf Kliemt](#) on Tue, 03 Dec 2013 13:23:06 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Hi.

Please note that there are negative chisquare values for various failed fit conditions.

Ralf

---

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Stefano Spataro](#) on Fri, 06 Dec 2013 16:39:34 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Then the standard macro `macro/run/ana_complete.C` should be modified in order to do the proper selections.

---

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Stefano Spataro](#) on Tue, 10 Dec 2013 17:16:35 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

I tried to do the following to avoid fit errors:

```
PndKinVtxFitter vtxfitter(jpsi[j]); // instantiate a vertex fitter
if (!vtxfitter.Fit()) continue;
```

But I have still negative chi2. Maybe I missed something?

---

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Jennifer Pütz](#) on Mon, 06 Jul 2015 12:14:31 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Hi everyone,

I still have negative Chi2 when I use the kinematic and the vertex fitters. Has anybody an idea how to fix it?

Cheers

Jenny

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Stefano Spataro](#) on Mon, 06 Jul 2015 12:18:52 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Is it better to provide a code snippet. There are several fitters.

---

Subject: Re: Chi2 of kinematic and vertex fitters  
Posted by [Jennifer Pütz](#) on Mon, 06 Jul 2015 12:56:09 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Ok, here is an example with negative Chi2 for the 4C-Fit (pbar p -> Lambda0 + AntiLambda0)  
-----

```
double pbarmom = 1.712;
double p_m0 = TDatabasePDG::Instance()->GetParticle("proton")->Mass();
TLorentzVector ini (0,0, pbarmom, sqrt(p_m0*p_m0+ pbarmom*pbarmom)+p_m0);
```

```
RhoCandList piplus, piminus, lambda0, antiLambda0, proton, antiProton, pbarpsystem,
Lambda0Fit, AntiLambda0Fit;
```

```
TString PidSelection = "PidAlgoIdealCharged";
```

```
theAnalysis->FillList(piminus, "PionAllMinus", PidSelection);
theAnalysis->FillList(piplus, "PionAllPlus", PidSelection);
theAnalysis->FillList(proton, "ProtonAllPlus", PidSelection);
theAnalysis->FillList(antiProton, "ProtonAllMinus", PidSelection);
```

```
int evt=0;
while (theAnalysis->GetEvent() && ++evt<nevt){
```

```
/**/Lambda0 -> PiMinus + Proton
lambda0.Combine(piminus,proton);
lambda0.Select(lambdaMassSelector);
lambda0.SetType(3122);
```

```

for (int j=0; j<lambda0.GetLength(); ++j){

    PndKinVtxFitter vertexfitterLambda0 (lambda0[j]);
    vertexfitterLambda0.Fit();
    RhoCandidate * lambda0Fit = lambda0[j]->GetFit();
    Lambda0Fit.Append(lambda0Fit);

}

/**AntiLambda0 -> PiMinus + Proton
antiLambda0.Combine(piplus,antiProton);
antiLambda0.Select(lambdaMassSelector);
antiLambda0.SetType(-3122);

for (int j=0; j<antiLambda0.GetLength(); ++j){
    PndKinVtxFitter vertexfitterAntiLambda0 (antiLambda0[j]);
    vertexfitterAntiLambda0.Fit();
    RhoCandidate * antiLambda0Fit = antiLambda0[j]->GetFit();
    AntiLambda0Fit.Append(antiLambda0Fit);
}

pbarpsystem.Combine(Lambda0Fit, AntiLambda0Fit);
pbarpsystem.SetType(88888);

for (int j=0; j<pbarpsystem.GetLength(); ++j){
    PndKinFitter Fitter4c (pbarpsystem[j]);
    Fitter4c.Add4MomConstraint(ini);
    Fitter4c.Fit();
}

Lambda0Fit.Cleanup();
AntiLambda0Fit.Cleanup();
}
-----


```

---

## File Attachments

1) [4C\\_negative\\_chi2.png](#), downloaded 635 times

## 4C-Fit pbarp system

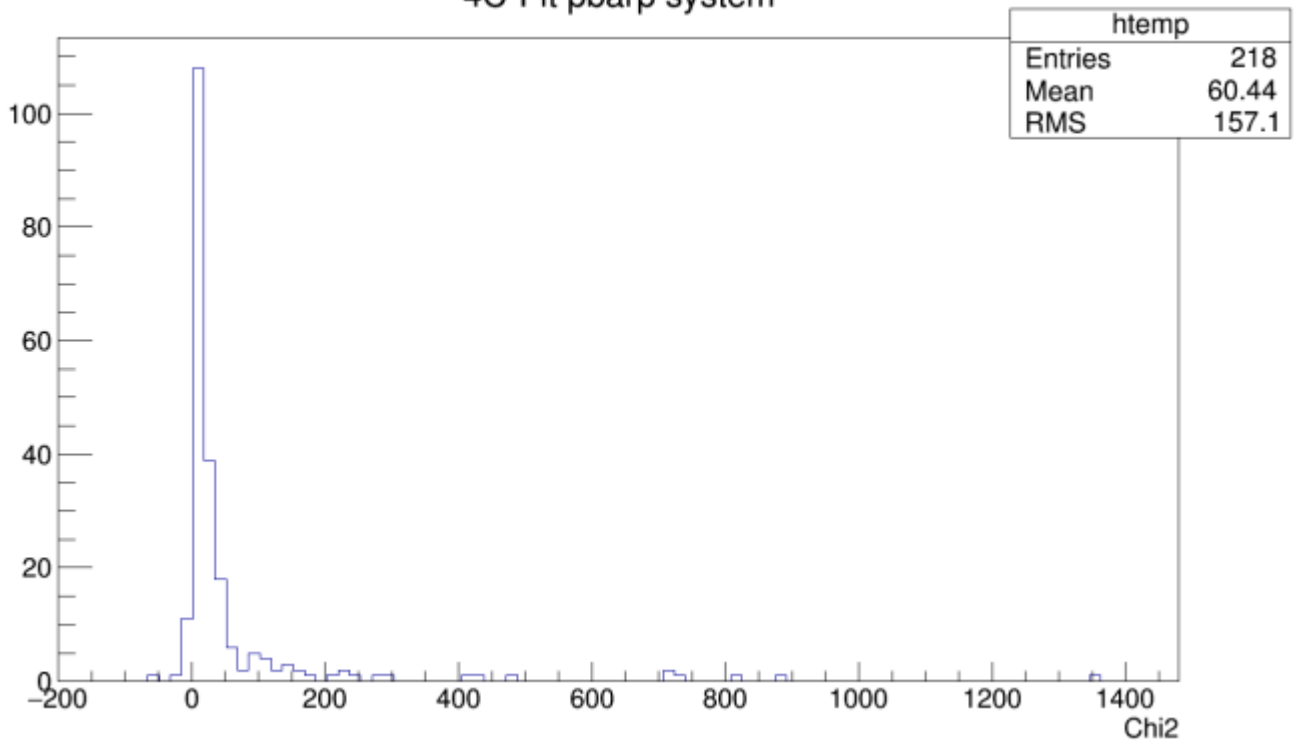

---

Subject: Re: Chi2 of kinematic and vertex fitters

Posted by [Stefano Spataro](#) on Wed, 08 Jul 2015 08:49:36 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Can you post all the macros you used?

---

Subject: Re: Chi2 of kinematic and vertex fitters

Posted by [Jennifer Pütz](#) on Wed, 08 Jul 2015 09:20:10 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

attached you find the macros

### File Attachments

- 1) [sim\\_complete.C](#), downloaded 286 times
- 2) [digi\\_complete.C](#), downloaded 269 times
- 3) [recoideal\\_complete.C](#), downloaded 306 times
- 4) [pidideal\\_complete.C](#), downloaded 278 times
- 5) [analysis\\_pbarp\\_lambda0.C](#), downloaded 300 times
- 6) [lambda0\\_antilambda0\\_pminus\\_p\\_piplus\\_antip.dec](#), downloaded 293 times

---

Subject: Re: Chi2 of kinematic and vertex fitters

Posted by [Stefano Spataro](#) on Wed, 08 Jul 2015 09:26:11 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

PndMCIdealTrackFinderNewLinks is not meant for analysis but just for QA, at the moment.  
Please use more standard reconstruction macros (-> macro/run/recoideal\_complete.C).

---

---

**Subject: Re: Chi2 of kinematic and vertex fitters**

Posted by [Jennifer Pütz](#) on Wed, 08 Jul 2015 13:28:22 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

After I tried it with the standard reconstruction macro and now there are no negative chi2 for the 4c fitter.

---

---

**Subject: Re: Chi2 of kinematic and vertex fitters**

Posted by [Stefano Spataro](#) on Thu, 09 Jul 2015 09:39:39 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Then maybe there are problems of covariance matrix in the new ideal tracker, or most probably it is not properly linked to the pidcorrelator.

---